




K O I N A M E D

ADVANCING HEALTHCARE THROUGH CUTTING-EDGE TECHNOLOGY

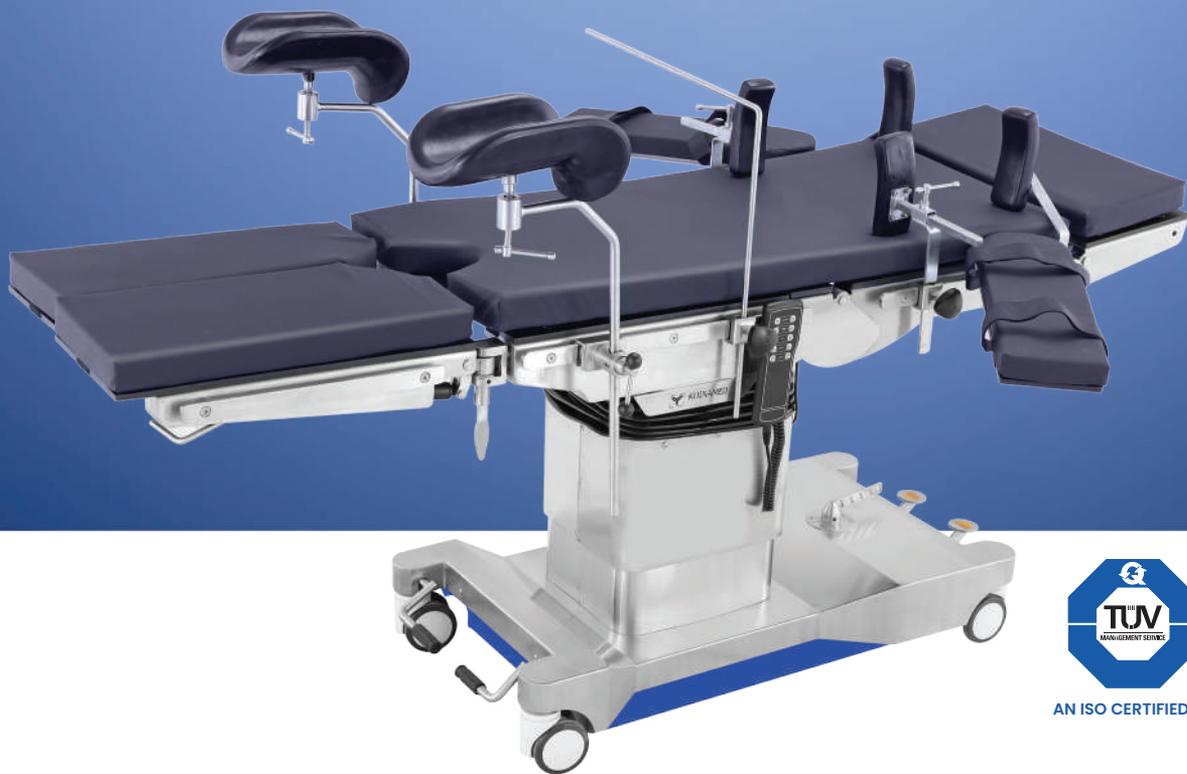

AN ISO CERTIFIED CO.



KOINAMED

CHOOSE CONFIDENTLY

PROUDLY
MADE IN INDIA



www.koinamed.com



KOINAMED
CHOOSE CONFIDENTLY

Manoj Kumar

Director



Dear valued customers,

I am proud to lead a company that has become a global leader in healthcare innovation and quality. With a rich legacy of over two decades, we have been at the forefront of developing cutting-edge technologies and medical devices that have transformed the healthcare landscape.

Our commitment to research and development has led to the creation of some of the most innovative healthcare products in the world, designed to meet the evolving needs of healthcare professionals and patients alike. Our products have been recognized globally for their quality and effectiveness.

At Koinamed, we are driven by a singular vision: to provide healthcare solutions that are accessible and affordable to all. We believe that access to quality healthcare is a fundamental right, and we are committed to using our expertise to make a difference in people's lives.

Our global presence has allowed us to impact millions of lives across continents, and we take great pride in our role in improving healthcare outcomes for people worldwide. Our commitment to quality, safety, and excellence has earned us the trust and confidence of healthcare professionals and patients alike, making Koinamed a brand synonymous with innovation, reliability, and integrity.

As we look to the future, we remain committed to our vision of transforming healthcare through innovation and technology. We will continue to push the boundaries of what's possible in the medical field and remain dedicated to providing the highest quality products and services to our customers worldwide.

Thank you for choosing Koinamed, and we look forward to serving you for years to come.

Manoj kumar

Sincerely,
Manoj Kumar
Director, Koinamed

KOINAMED is one of the prominent ISO 9001:2008, ISO 13485:2003, ISO 14001:2004, OHSAS 18001:2007 & CE certificated Company, specializing in the production of Operation Theatre Lights and Tables in India, which is continued to be the trendsetter throughout the years of history. From the last 15 years, we have created a proficient niche both in the domestic and international medical industry, with its products sold nationwide and to countries and regions like Europe, The Middle East, South America, Africa and South East Asia. We have the privilege to design and distribute the most sophisticated and technological latest products in the service of medical profession. Our Research and Development department is continuously involved in designing & developing better design and technical solution at the required standard by the customers.

We are empowered with an efficient workforce of skilled and dedicated staff.

Our manufacturing facilities are located in Delhi, equipped with the latest machinery and all the work is done in house. While continuously increasing the production process, we also continuously improve the product quality.

We assure to satisfy you with our quality, workmanship and after sales service as we always do to meet the requests of our valuable customers. We give our customers a tailor made cost for cost effectiveness by keeping close watch at every step in order to give a personalized service. Motivated by the service philosophy of "Endeavor to affect customers". Technomed will, as always preserve in creating the new image of Indian Medical Equipments production and contribution to the health of all human beings around the world.

We can also manufacture the equipment according to your required specification as we are the original manufacturers, so please let us know if you need any change.

> Koinamed India



> Hass VMC



> Laser Machine



> Robot Welding



> Press Brake




> ITL



> Smarturn LT Linear CNC Lathe Machine



> Dispatch

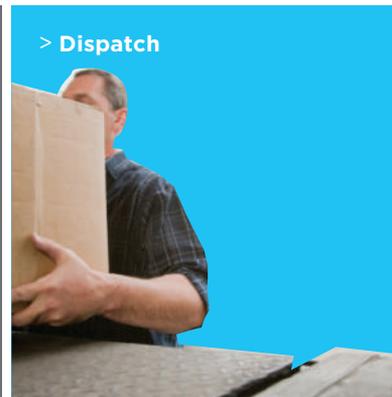

> Manufacturing Team



> Sales Team



EQUIPPED WITH ADVANCED FEATURES



1 Sterilizable Handle



2 Safety Glass for Lens Protection

We offer LED lights with protective fire resistant ESG safety glass cover for scratch proof, fast disinfection process and improve the light penetration. It is made of monolayer safety glass which protects the lens from ultra-violet and infrared rays.



3 Control Panel

Touch control panel on the light head.

- On-Off
- Illumination intensity
- Color temperature
- Endo illumination mode



4 Endo Mode

To meet the requirement of low ambient illumination.



350mm

160,000 lux

5 HD Documentation for Continuous Medical Education (CME)

- Auto focus
- Integrated central camera or independent third-arm camera (Optional)



6 Focusing System

The brightness of different LEDs is adjusted automatically to change the spot size, which will avoid the possible occurrence of mechanical malfunctions.

INDEX

OMEGA

Series 1-3

NOVA

Series 4-5

HEX

Series 6-7

HEX CT 19 LED

Series 8-12

HEX CT 14 LED

Series 13-17

EXAMINATION

Lights 18-19

OT TABLES

Surgical/Ophthalmic/Gynae/Animal
Derma Chair/Imaging Table 20-41

ACCESSORIES

Standard / Optional 42-44



PROUDLY
MADE IN INDIA





KOINAMED

CHOOSE CONFIDENTLY

— K O I N A M E D —

**ADVANCING HEALTHCARE THROUGH
CUTTING-EDGE TECHNOLOGY**



AN ISO CERTIFIED CO.



Visit our Website



Chat with us

>> OMEGA 500+500

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. Body is made of high quality fire resistant polymer.

Single non winged round shape lamp head for easy maintenance and better sealing against dust and fumigation.

Features

-  Memory Function
-  Endo Mode



Technical Specifications

Intensity	1,60,000 + 1,60,000 Lux ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	126 +126
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable
Monitor / Camera	Optional

Optional

-  Wireless Wall Controller
-  360° Rotation
-  Battery Backup



OMEGA 500

Technical Specifications

Intensity	1,60,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	126
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable
Monitor / Camera	Optional



Mobile Model

Mobile Model
with battery backup

>> OMEGA 400+400

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. Body is made of high quality fire resistant polymer.

Single non winged round shape lamp head for easy maintenance and better sealing against dust and fumigation.

Features

-  Memory Function
-  Endo Mode



Technical Specifications

Intensity	1,30,000 + 1,30,000 Lux ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	54 + 54
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable
Monitor / Camera	Optional

Optional

-  Wireless Wall Controller
-  360° Rotation
-  Battery Backup



Mobile Model

Mobile Model
with battery backup

OMEGA 400

Technical Specifications

Intensity	1,30,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	54
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable
Monitor / Camera	Optional

>> OMEGA 200+200

Special Features

Shadowless Light, Body is made of high quality fire resistant polymer.
Single non winged round shape lamp head for easy maintenance and better sealing against dust and fumigation.

Technical Specifications

Intensity	80,000 + 80,000 ±10%
Size of Light Field	15 cm
Colour Temperature	4500 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	28 + 28
Diameter of Light	200mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White
Focusing	Fixed



Optional

-  360° Rotation
-  Battery Backup

>> OMEGA 200

Special Features

Shadowless Light, Body is made of high quality fire resistant polymer.
Single non winged round shape lamp head for easy maintenance and better sealing against dust and fumigation.

Technical Specifications

Intensity	80,000 ±10%
Size of Light Field	15 cm
Colour Temperature	4500 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	28
Diameter of Light	200mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White
Focusing	Fixed



Mobile Model

Mobile Model
with battery backup

Optional

-  360° Rotation
-  Battery Backup

>> KMI NOVA SERIES

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode

Optional

-  Wireless Wall Controller
-  360° Rotation
-  Battery Backup

Technical Specifications

Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Diameter of Light	600mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

All Models are available in Single Dome, Double Dome, Mobile with / without Battery Backup and Wall Mounted also.



KMI NOVA 6+6

Intensity	1,60,000 + 1,60,000 ±10%
Number of LED	126 + 126



KMI NOVA 6+5

Intensity	1,60,000 + 1,40,000 ±10%
Number of LED	126 + 105





KMI NOVA 6+4

Intensity	1,60,000 + 1,30,000 ±10%
Number of LED	126 + 84



KMI NOVA 6+3

Intensity	1,60,000 + 1,00,000 ±10%
Number of LED	126 + 63



KMI NOVA 5+5

Intensity	1,40,000 + 1,40,000 ±10%
Number of LED	105 + 105



KMI NOVA 5+4

Intensity	1,40,000 + 1,30,000 ±10%
Number of LED	105 + 84



KMI NOVA 5+3

Intensity	1,40,000 + 1,00,000 ±10%
Number of LED	105 + 63



KMI NOVA 4+4

Intensity	1,30,000 + 1,30,000 ±10%
Number of LED	84 + 84



KMI NOVA 4+3

Intensity	1,30,000 + 1,00,000 ±10%
Number of LED	84 + 63



KMI NOVA 3+3

Intensity	1,00,000 + 1,00,000 ±10%
Number of LED	63 + 63

>> KMI HEX SERIES

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode

Optional

-  Wireless Wall Controller
-  360° Rotation
-  Battery Backup

Technical Specifications

Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

All Models are available in Single Dome, Double Dome, Mobile with / without Battery Backup and Wall Mounted also.



KMI HEX 126+126

Intensity	1,60,000 + 1,60,000 ±10%
Number of LED	126 + 126



KMI HEX 126+105

Intensity	1,50,000 + 1,60,000 ±10%
Number of LED	105 + 126





KMI HEX 126+84

Intensity	1,30,000 + 1,60,000 ±10%
Number of LED	84 + 126



KMI HEX 126+63

Intensity	1,60,000 + 90,000 ±10%
Number of LED	126 + 63



KMI HEX 105+105

Intensity	1,50,000 + 1,50,000 ±10%
Number of LED	105 + 105



KMI HEX 105+84

Intensity	1,50,000 + 1,30,000 ±10%
Number of LED	105 + 84



KMI HEX 105+63

Intensity	1,50,000 + 90,000 ±10%
Number of LED	105 + 63



KMI HEX 84+84

Intensity	1,30,000 + 1,30,000 ±10%
Number of LED	84 + 84



KMI HEX 84+63

Intensity	1,30,000 + 90,000 ±10%
Number of LED	84 + 63



KMI HEX 63+63

Intensity	90,000 + 90,000 ±10%
Number of LED	63 + 63

>> KMI HEX CT 5+5

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode



Technical Specifications

Intensity	1,40,000 + 1,40,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	95 + 95
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

Optional

-  Wireless Wall Controller
-  Battery Backup

>> KMI HEX CT 5+4

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode



Technical Specifications

Intensity	1,40,000 + 1,10,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	95 + 76
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

Optional

-  Wireless Wall Controller
-  Battery Backup

>> KMI HEX CT 5+3

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode



Optional

-  Wireless Wall Controller
-  Battery Backup

Technical Specifications

Intensity	80,000 + 1,40,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	57 + 95
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

>> KMI HEX CT 4+4

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode



Optional

-  Wireless Wall Controller
-  Battery Backup

Technical Specifications

Intensity	1,10,000 + 1,10,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	76 + 76
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

>> KMI HEX CT 4+3

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode



Optional

-  Wireless Wall Controller
-  Battery Backup

Technical Specifications

Intensity	80,000 + 1,10,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	57 + 76
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

>> KMI HEX CT 3+3

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode



Optional

-  Wireless Wall Controller
-  Battery Backup

Technical Specifications

Intensity	80,000 + 80,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	57 + 57
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

>> KMI HEX CT 5

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode



Optional

-  Wireless Wall Controller
-  Battery Backup

Technical Specifications

Intensity	1,40,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	95
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Mobile Model

Mobile Model
with battery backup

>> KMI HEX CT 4

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode



Optional

-  Wireless Wall Controller
-  Battery Backup

Technical Specifications

Intensity	1,10,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	76
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Mobile Model

Mobile Model
with battery backup

>> KMI HEX CT 3

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Features

-  Memory Function
-  Endo Mode

Technical Specifications

Intensity	80,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	57
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Mobile Model

Mobile Model
with battery backup

Optional

-  Wireless Wall Controller
-  Battery Backup



>> KMI HEX CT 5+5 (14 LED)

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, with special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Technical Specifications

Intensity	1,40,000 + 1,40,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	70 + 70
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Optional

-  Battery Backup
-  All LED in White Colour
-  Wireless Wall Controller

>> KMI HEX CT 5+4 (14 LED)

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, with special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Technical Specifications

Intensity	1,10,000 + 1,40,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	56 + 70
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Optional

-  Battery Backup
-  All LED in White Colour
-  Wireless Wall Controller

>> KMI HEX CT 5+3 (14 LED)

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, with special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Technical Specifications

Intensity	90,000 + 1,40,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	42 + 70
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Optional

-  Battery Backup
-  All LED in White Colour
-  Wireless Wall Controller

>> KMI HEX CT 4+4 (14 LED)

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, with special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Technical Specifications

Intensity	1,10,000 + 1,10,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	56 + 56
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Optional

-  Battery Backup
-  All LED in White Colour
-  Wireless Wall Controller

>> KMI HEX CT 4+3 (14 LED)

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, with special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Technical Specifications

Intensity	90,000 + 1,10,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	42 + 56
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Optional

-  Battery Backup
-  All LED in White Colour
-  Wireless Wall Controller

>> KMI HEX CT 3+3 (14 LED)

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, with special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Technical Specifications

Intensity	90,000 + 90,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	42 + 42
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Optional

-  Battery Backup
-  All LED in White Colour
-  Wireless Wall Controller

>> KMI HEX CT 5 (14 LED)

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, with special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



Technical Specifications

Intensity	1,40,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	70
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Mobile Model

Mobile Model
with battery backup

Optional

-  Battery Backup
-  All LED in White Colour
-  Wireless Wall Controller

>> KMI HEX CT 4 (14 LED)

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, with special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



Technical Specifications

Intensity	1,10,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	56
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Mobile Model

Mobile Model
with battery backup

Optional

-  Battery Backup
-  All LED in White Colour
-  Wireless Wall Controller

>> KMI HEX CT 3 (14 LED)

Adjustable Colour Temperature

Special Features

Shadowless Light, Memory Function, High quality sterilizable handle, with special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



Technical Specifications

Intensity	90,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	42
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Mobile Model

Mobile Model
with battery backup

Optional



Battery Backup



All LED in White Colour



Wireless Wall Controller



>> KMI EL-NOVA

Special Features

Shadowless Light, With special European design for ventilation of heat. Body is made of high quality fire resistant polymer. With Dual Colour LED White and Yellow.



Optional

 Battery Backup

Technical Specifications

Intensity	55,000 Lux \pm 10%
Size of Light Field	125 mm
Colour Temperature	4500-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	21
Brightness Control	Touch
Diameter of Light	150 mm
Power Supply	220V/50Hz AC



Wall Mounted

Wall Mounted
with Extended Rod

Note: Also available Table Mounted

>> KMI EL-HEX

Special Features

Shadowless Light, With special European design for ventilation of heat. Body is made of high quality fire resistant polymer. With Dual Colour LED White and Yellow.



Optional

 Battery Backup

Technical Specifications

Intensity	45,000 Lux \pm 10%
Size of Light Field	125 mm
Colour Temperature	4500-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	14
Brightness Control	Touch
Diameter of Light	150 mm
Power Supply	220V/50Hz AC



Wall Mounted

Wall Mounted
with Extended Rod

Note: Also available Table Mounted

>> KMI EL-ALPHA

Special Features

Shadowless Light, with special European design for ventilation of heat. Body is made of high quality fire resistant polymer. With Dual Colour LED White and Yellow.



Technical Specifications

Intensity	45,000 Lux \pm 10%
Size of Light Field	125 mm
Colour Temperature	4500-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	14
Brightness Control	Touch
Diameter of Light	150 mm
Power Supply	220V/50Hz AC



Wall Mounted

Wall Mounted
with Extended Rod

Note: Also available Table Mounted

Optional

-  Battery Backup
-  All LED in White Colour

>> KMI MB-07

Special Features

Shadowless Light, With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



Technical Specifications

Intensity	25,000 Lux \pm 10%
Size of Light Field	100 mm
Colour Temperature	4800 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	7
Diameter of Light	125 mm
Power Supply	220V/50Hz AC



Wall Mounted

Wall Mounted
with Extended Rod

Note: Also available Table Mounted

Optional

-  Battery Backup

>> MATRIX EHO

ELECTRO HYDRAULIC OT TABLE WITH MANUAL OVERRIDE SYSTEM



Minimum Height	750 mm
Maximum Height	1050 mm

304 Medical Grade
Stainless Steel

Special Features

Engineered for increasingly complex surgical scenes, Matrix EHO comes with extreme loads in any position. The modular structure enables it to be adapted to match the size of the patient and in no time at all it can be equipped for any surgical discipline. With the characteristics of high automation low noise and high reliability, Matrix EHO can be regarded as an ideal electro-hydraulic operating table.

- ▶ Modular design tabletop tailored for various surgical discipline needs. The easy click new mounting point enables the table adapted to wide variety of surgery and patient's height, waterproof design Mattress.
- ▶ Extreme weight load capacity of 300 kg with highest safety and stability.
- ▶ Standard override panel control makes the control safer.

MATRIX EHO ULTRA LOW



Minimum Height	640 mm
Maximum Height	1040 mm

Technical Specifications

Length of Table	2000 mm
Width of Table Top	540 mm
Height (without Mattress)	Min. 750 to max. 1000 mm
Trendelenburg	25°
Lateral Tilt	20°
Back Section	± 70°
Head Section	± 60°
Leg Section	0°-90°
Floor Locking System	Center Floor Locking
Weight Capacity	300 kg
Top Sliding	5" Reverse & 5" Forward

Salient Features

- ▶ Split Leg Section
- ▶ Stainless Fitting
- ▶ Sliding Top
- ▶ Detachable : head, leg & pelvic section
- ▶ In built kidney bridge
- ▶ Five sectional radio – Translucent Top
- ▶ Base & Cover mode of attractive, easy to clean Stainless Steel
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

>> MATRIX
ELECTRIC OT TABLE



Optional

-  Wireless Remote
-  Reverse Orientation Mode
-  Manual Override

304 Medical Grade
Stainless Steel

Special Features

- ▶ SMPS based control box which can handle better Voltage Fluctuations, When SMPS is idle there is zero current consumption and saves power. These are as per new European and American standards where the idle power consumption should be zero and where transformer based system are outdated.
- ▶ Zero position facility i.e by pressing the single button OT Table will come to normal position.
- ▶ The motion of table is easy with double swivel castors 100mm diameter, in which 2 castors having brakes.
- ▶ Stainless steel Covered Base and Column Covers for easy cleaning and hygiene.
- ▶ 2 memory function in control panel.
- ▶ The Handset is designed with Back LED Indicator for better visibility.
- ▶ Anti Bacterial and Anti Fungal Mattress.

Salient Features

- ▶ Stainless Fitting - Detachable, head, leg section
- ▶ In built kidney bridge
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

Technical Specifications

Length of Table	2000 mm
Width of Table Top	540 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	20°
Back Section	+70°
Head Section	+60°
Leg Section	0°-90°
Floor Locking System	Center Floor Locking

>> MATRIX ADVANCE

ELECTRIC OT TABLE

Features

 Memory Function



Minimum Height	750 mm
Maximum Height	1000 mm

Optional

-  Wireless Remote
-  Reverse Orientation Mode
-  Manual Override

304 Medical Grade Stainless Steel

SMPS based control box which can handle better Voltage Fluctuations, When SMPS is idle there is zero current consumption and saves power. These are as per new European and American standards where the idle power consumption should be zero and where transformer based system are outdated. We provide remote which is ergonomically designed to have an easy and better grip with spiral cable and it has LED backlit switch with symbolic position figures making it convenient to use even in the dark.

Special Features

- ▶ Zero position facility i.e by pressing the single button OT Table will come to normal position.
- ▶ Patient reverse orientation mode when head and leg section are interchanged.
- ▶ Stainless steel Covered Base and Column Covers for easy cleaning and hygiene.
- ▶ 2 memory function in control panel.
- ▶ Indication of battery back in the second handset.
- ▶ Anti Bacterial and Anti Fungal Mattress.
- ▶ The Handset is designed with Back LED Indicator for better visibility.
- ▶ Head and foot section is manually operated by the means of Ratchet System.

Technical Specifications

Length of Table	2000 mm
Width of Table Top	540 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	20°
Back Section	+80°
Head Section	+60°
Leg Section	0°-90°
Floor Locking System	Center Floor Locking
Top Sliding	5" Reverse & 5" Forward

MATRIX ADVANCED ULTRA LOW



Minimum Height	670 mm
Maximum Height	1070 mm

Salient Features

- ▶ Sliding Top
- ▶ Split Leg Section
- ▶ Center Pillar
- ▶ Stainless Fitting - Detachable, head, leg & Pelvic section
- ▶ In built kidney bridge
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.



Trendelenburg



Reverse Trendelenburg



Flex Position



Reflex Position



Lateral Tilt - Left & Right



Height Adjustment - Up & Down



Gynec Position



Kidney Position

>> KMI 1201
C-ARM COMPATIBLE ELECTRIC OT TABLE



304 Medical Grade
Stainless Steel


Optional



Wireless Remote



Manual Override



Low Height



Floor Locking by Remote

Special Features

- ▶ Eccentric Pillars
- ▶ Stainless Fitting
- ▶ Detachable, head, leg & Pelvic section
- ▶ In built kidney bridge
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

Table Positions

- ▶ Height Adjustment - Up & Down
- ▶ Lateral Tilt - Left & Right
- ▶ Trendelenburg & Reverse Trendelenburg
- ▶ Flex Position & Reflex Position

Technical Specifications

Length of Table	2000 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

>> KMI 1201 ADVANCE

C-ARM COMPATIBLE ELECTRIC OT TABLE

Features

-  Additional Control Panel
-  Memory Function
-  Zero Position



Optional

304 Medical Grade
Stainless Steel



Wireless Remote



Manual Override



Low Height



Floor Locking by Remote

Special Features

- ▶ SMPS based control Box.
- ▶ Can handle better Voltage Fluctuations.
- ▶ When idle has zero current consumption and saves power, these are as per new European and American Standards where the idle power consumption should be zero and where Transformer based systems are outdated
- ▶ Handset and Additional control panel
- ▶ Indication of Battery Back provided in the second handset.
- ▶ The Control panel has 2 memory functions.
- ▶ The second handset has also safety key to lock the complete handset
- ▶ The Handset is designed with Back LED Indicator for better visibility.
- ▶ This is the only handset with Backlight features

Salient Features

- ▶ Eccentric Pillars
- ▶ Stainless Fitting
- ▶ Detachable, head, leg & Pelvic section
- ▶ In built kidney bridge
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

Technical Specifications

Length of Table	2000 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

Table Positions

- ▶ Height Adjustment - Up & Down
- ▶ Lateral Tilt - Left & Right
- ▶ Trendelenburg & Reverse Trendelenburg
- ▶ Flex Position & Reflex Position

>> KMI 1201 CENTER PILLAR

C-ARM COMPATIBLE ELECTRIC OT TABLE



Optional


304 Medical Grade
Stainless Steel



Wireless Remote



Manual Override



Low Height



Floor Locking by Remote

Special Features

- ▶ Stainless Fitting
- ▶ Detachable, head, leg section
- ▶ In built kidney bridge
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

Table Positions

- ▶ Height Adjustment - Up & Down
- ▶ Lateral Tilt - Left & Right
- ▶ Trendelenburg & Reverse Trendelenburg
- ▶ Flex Position & Reflex Position

Technical Specifications

Length of Table	2000 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

>> KMI 1202

C-ARM COMPATIBLE HYDRAULIC OT TABLE



304 Medical Grade
Stainless Steel

>> KMI 1202 EL

C-ARM COMPATIBLE SEMI-ELECTRIC OT TABLE



ELECTRIC UP & DOWN

Optional

Battery Backup

304 Medical Grade
Stainless Steel

Special Features

- ▶ Eccentric Pillars
- ▶ Stainless Fitting
- ▶ Detachable, head, leg & Pelvic section
- ▶ In built kidney bridge
- ▶ Five Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, east to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.

Technical Specifications

Length of Table	2000 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

>> KMI 1203
GENERAL SURGERY OT TABLE HYDRAULIC

HYDRAULIC UP & DOWN



>> KMI 1203 EL
GENERAL SURGERY OT TABLE SEMI-ELECTRIC

ELECTRIC UP & DOWN



Optional

- Battery Backup

Technical Specifications

Length of Table	2000 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

Special Features

- ▶ Center Pillar
- ▶ Stainless Fitting
- ▶ Detachable, head, leg & Pelvic section
- ▶ In built kidney bridge
- ▶ Five Sectional Radio - Translucent.
- ▶ Base & Cover made of attractive, east to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.

>> KMI 1204
SLIDING TOP ELECTRIC OT TABLE

Features

 Sliding Top



304 Medical Grade
Stainless Steel

Optional






Wireless Remote Manual Override Low Height Floor Locking by Remote

Special Features

This Electromatic sliding top O.T Table is suitable for all kind of surgeries, i.e. general surgery, vascular surgery, cardio, neurology, urology, gynecology, proctology, laparoscopy, traumatic surgery, plastic surgery and others. The base & column of the table is made of high quality medical stainless steel (Grade - 304). Non-reflecting surface, antibacterial & easy to clean. We provide with a top sliding of 5inch back/forward. Height adjustment, Lateral Tilts, Trendelenburg, and Flex - Reflex, Chair Position and Longitudinal Sliding top are realized by Remote control.

Salient Features

- ▶ Eccentric Pillars
- ▶ Stainless Fitting
- ▶ Detachable, head, leg & Pelvic section
- ▶ Four Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

Technical Specifications

Length of Table	2000 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Top Sliding	5" Reverse & 5" Forward

Table Positions

- ▶ Height Adjustment - Up & Down
- ▶ Lateral Tilt - Left & Right
- ▶ Trendelenburg & Reverse Trendelenburg
- ▶ Flex Position & Reflex Position

>> KMI 1204 ADVANCE

ELECTRIC OT TABLE WITH SLIDING TOP

Features

-  Additional Control Panel
-  Memory Function
-  Zero Position



304 Medical Grade
Stainless Steel

Optional



Wireless Remote



Manual Override



Low Height



Floor Locking by Remote

Special Features

This Electromatic sliding top O.T Table is suitable for all kind of surgeries, i.e. general surgery, vascular surgery, cardio, neurology, urology, gynecology, proctology, laparoscopy, traumatic surgery, plastic surgery and others. The base & column of the table is made of high quality medical stainless steel (Grade - 304). Non-reflecting surface, antibacterial & easy to clean. We provide with a top sliding of 5inch back/forward. Height adjustment, Lateral Tilts, Trendelenburg, and Flex - Reflex, Chair Position and Longitudinal Sliding top are realized by Remote control.

Salient Features

- ▶ Eccentric Pillars
- ▶ Stainless Fitting
- ▶ Detachable, head, leg & Pelvic section
- ▶ Four Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the table top for precise patient positioning.
- ▶ Standby Battery Back-up with recharging circuit.

Technical Specifications

Length of Table	2000 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Top Sliding	5" Reverse & 5" Forward

Table Positions

- ▶ Height Adjustment - Up & Down
- ▶ Lateral Tilt - Left & Right
- ▶ Trendelenburg & Reverse Trendelenburg
- ▶ Flex Position & Reflex Position

>> KMI 1205
NEURO ATTACHMENT SUJITA



304 Medical Grade
Stainless Steel

>> KMI 1205 M
NEURO ATTACHMENT MAYFIELD



304 Medical Grade
Stainless Steel

Special Features

The model with lightweight design, easy set and use. Could meet the most clinical demands on neurosurgery and spinal, etc. Suitable for both pediatric and adults. Produced from the standard aluminum alloy, good durability and strength. Stable, high-precision 3-point fixation of the head, Easy fixation ball socket adaptor provide good view. Support patient in prone, supine, lateral and sitting

>> KMI 1206
ALBEE'S TYPE ORTHO ATTACHMENT



Special Features

Ortho Attachment allows the table to be used for the lower extremity procedures. Available at competitive prices our ortho attachment is purely made of stainless steel which resist corrosion.

Salient Features

- ▶ The Orthopedic Attachment can be used with any operating table.
- ▶ In addition, a pelvic support plate is supported on top of the frame and is formed with an asymmetrical construction.
- ▶ Stirring Instruments allows flexion/raising of legs & stirring/string ball joints locked from foot end.
- ▶ Two traction devices on sliding spot with ball joint allowing flexions & rotations of foot with traction shoe with metallic sole.
- ▶ Padded orthopedic knee crutches/provides support to the legs of the patient.



Patient positioning for Neck of femur nailing traction (D.H.S)




Femur treatment in lateral position



Tibia extension position

>> KMI 1206
HANGING TYPE ORTHOPEDIC ATTACHMENT

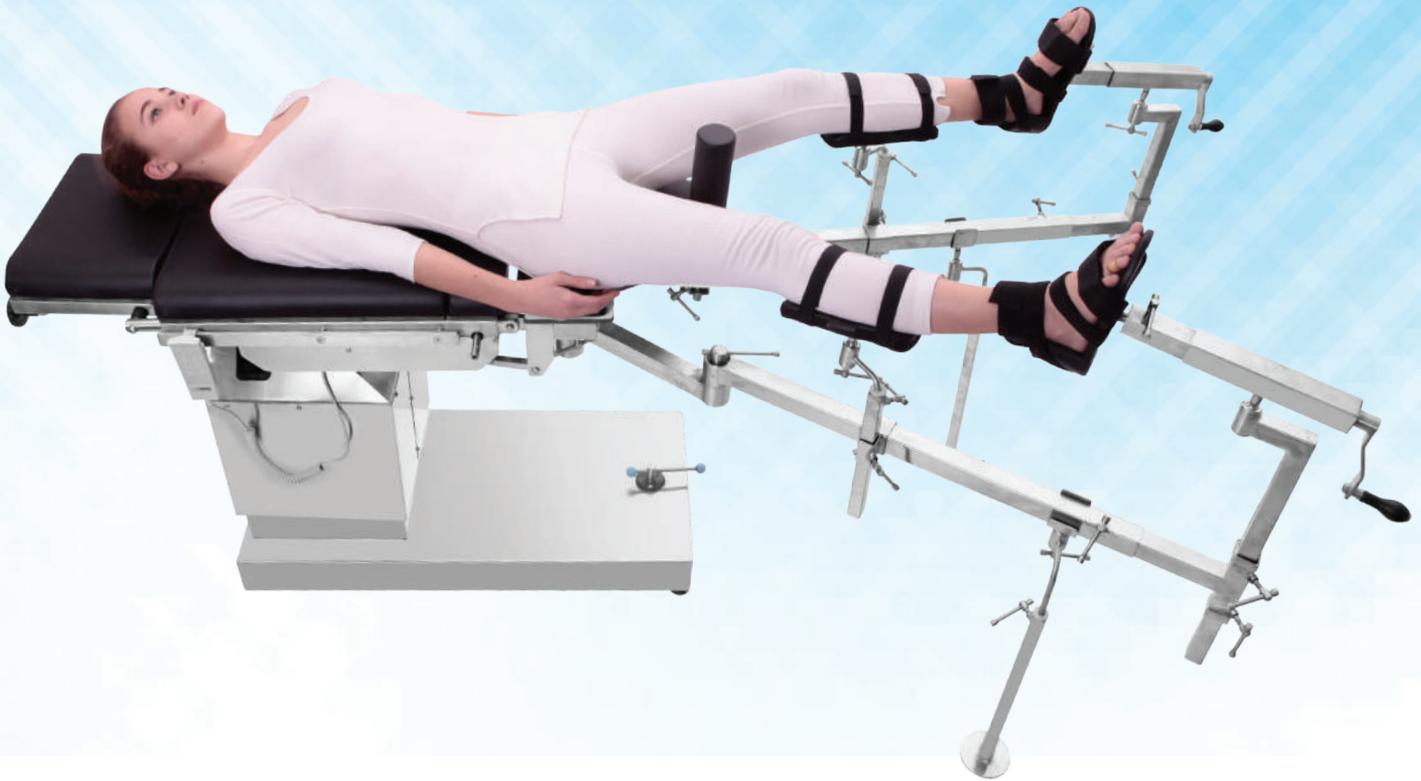

Special Features

Ortho Attachment allows the table to be used for the lower extremity procedures. Available at competitive prices our ortho attachment is purely made of stainless steel which resist corrosion.

Salient Features

- ▶ The Orthopedic Attachment can be used with any operating table.
- ▶ In addition, a pelvic support plate is supported on top of the frame and is formed with an asymmetrical construction.
- ▶ Stirring Instruments allows flexion/raising of legs & stirring/string ball joints locked from foot end.
- ▶ Two traction devices on sliding spot with ball joint allowing flexions & rotations of foot with traction shoe with metallic sole.
- ▶ Padded orthopedic knee crutches/provides support to the legs of the patient.

>> KMI 1207
OPHTHALMIC ELECTRIC OT TABLE



Optional

 Battery Backup

 Foot Switch

 Instrument Tray

304 Medical Grade
Stainless Steel



Special Features

This Ophthalmic Table is specially designed for ophthalmic surgery. Three sectional table is provided with drainage system in the head section. The table has sturdy base, column made up of stainless steel, antibacterial and is easy to clean. Electromotive height with the help of lightweight handheld control unit

Standard Accessories

- ▶ Anesthetic Screen
- ▶ IV Pole
- ▶ Hand Rest
- ▶ Mattress

Optional

- ▶ Instrument Tray

Technical Specifications

Length of Table	2000 mm
Width of Table Top	540 mm
Minimum Height (without Mattress)	Min. 640 mm
Maximum Height (without Mattress)	Max. 940 mm
Leg Section	0°-90°

Salient Features

- ▶ Stainless Fitting
- ▶ Detachable, head & leg section
- ▶ Three Sectional Radio - Translucent Top.
- ▶ Base & Cover made of attractive, easy to clean Stainless Steel.
- ▶ Sophisticated mechanics provide smooth, step less articulation of the Table Top for precise patient positioning

Table Positions

- ▶ Height Adjustment - Up & Down

>> KMI 1208
ELECTRIC GYNECOLOGICAL OBSTETRIC OT TABLE



Gynae Tray



Birth Handle

Optional

 Battery Backup

 Foot Switch



304 Medical Grade
Stainless Steel

Colour options



White Blue Pink

>> KMI 1208H
HYDRAULIC



Special Features

Obstetrics operating room table perfect for all kinds of gynecological operations. The cover for base and column is made of 304 stainless steel, good performance on anti-rust and easy to clean.

Technical Specifications

Length of Table	1840 mm
Width of Table Top	550 mm
Minimum Height (without Mattress)	Min. 700 mm
Maximum Height (without Mattress)	Max. 950 mm
Trendelenburg	20°
Back Section	±70°
Floor Locking System	Manual


Salient Features

- ▶ Functional and versatile
- ▶ Flexibility and precision
- ▶ Hygienic design
- ▶ Easy cleaning
- ▶ User-friendly

Standard Accessories

- ▶ Arm Rest - 2 pcs.
- ▶ Birth Handle - 2 pcs.
- ▶ Mattress
- ▶ Gynae Tray

>> KMI 1200
ELECTRIC GYNECOLOGICAL OBSTETRIC OT TABLE

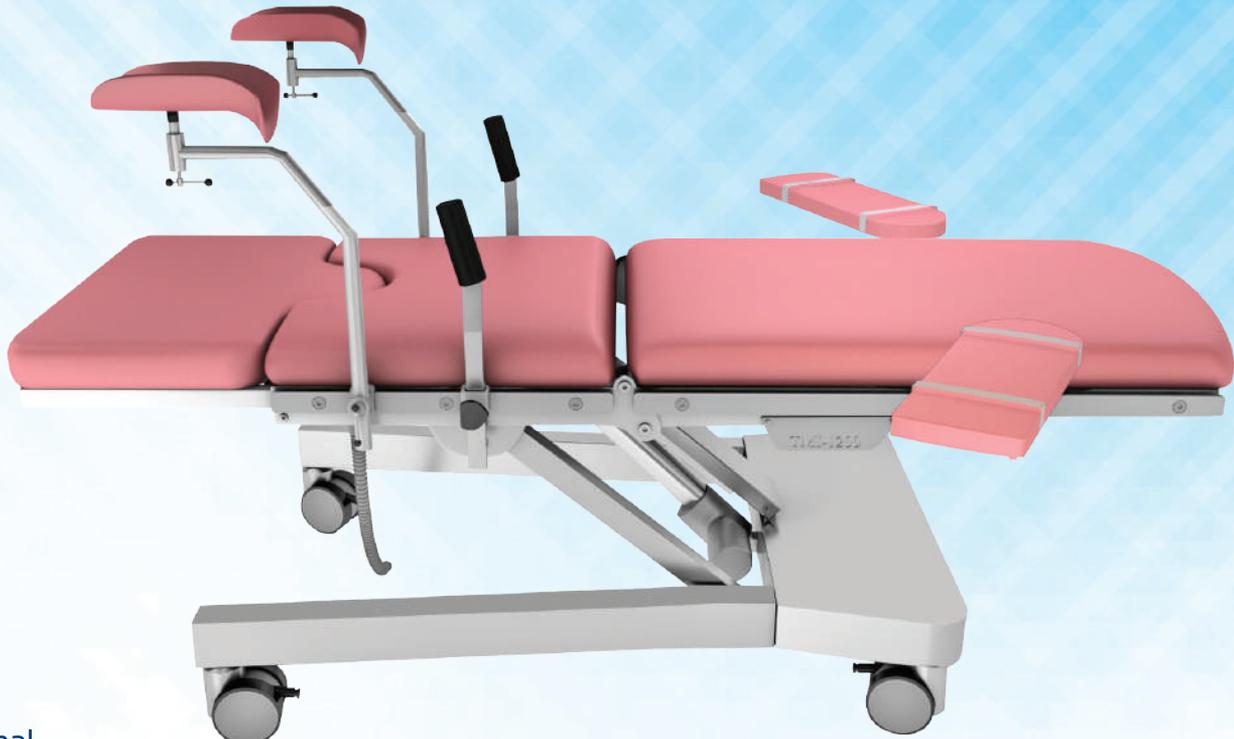

Optional


 Battery Backup

 Foot Switch



304 Medical Grade
Stainless Steel

Colour options



Pink Blue Black

Salient Features

This is a highly versatile delivery bed, offering total flexibility for the doctor, midwife and nurse. For the mother, it eases greatly the trauma of labour and delivery.

Special Features

- ▶ Adjustable height and orientation of the seat and back rest offer very high flexibility
- ▶ Hand-operated Remote
- ▶ U-cut seat for maximum accessibility
- ▶ Detachable leg rest meets the requirements of both the professional and the patient
- ▶ Leg support for comfortable patient positioning
- ▶ Easy-to-clean Gyneec Tray
- ▶ Firm hand grips provide good support for the patient
- ▶ Soft and warm cushion base, with hygienic upper layer
- ▶ Foot-operated controls provide operational ease
- ▶ Lithotomy
- ▶ Adjustable integrated IV pole can be positioned on either side of bed

Technical Specifications

Total Length	185 ± 5cm (73")
Length, without foot section	140 ± 5cm (55")
Width with side rail	79 ± 5cm (31")
Width without side rail	69 ± 5cm (27")
Minimum Height	49 ± 5cm (19")
Maximum Height	112 ± 5cm (44")
Back section adjustment	-5° to +70°

Optional Accessories

- ▶ Foot Switch
- ▶ Battery back-up supporting up to 50 movements
- ▶ Anaesthesia screen holder

>> KMI 1209
ELECTRIC DERMA CHAIR



Optional

 Battery Backup

 Foot Switch



304 Medical Grade
Stainless Steel

Colour options



Special Features

- ▶ Luxurious Styling
- ▶ Multi-position section couch
- ▶ Suitable for all Dermatology, Cosmetology & Laser Surgery.
- ▶ Stable and professional design, unlike Saloon Chairs.
- ▶ Three independent motors - for Height, Leg Section & Back Section
- ▶ Elegant upholstery and all english colours

Technical Specifications

Length of Table	1900 mm
Width of Table	620 mm
Minimum Height (with Mattress)	Min. 570 mm
Maximum Height (with Mattress)	Max. 770 mm
Weight	80 Kgs
Leg Section	0°-70°
Back Section	±75°
Motors	3 independent
Power	230 V 50 Hz
Remote	Provided



Height Adjustment - Up / Down

>> KMI 1211
AUTOMATIC IMAGING
TABLE FOR ERCP



Optional

-  Battery Backup
-  Sliding Top

304 Medical Grade
Stainless Steel


Special Features

- ▶ Our Imaging Table have been specially developed for use in the field of radiology.
- ▶ The absence of a longitudinal brace at the front of the leg frame makes the use of a C-arm easily possible.
- ▶ These Imaging Table are now available in a battery powered version.
- ▶ Imaging Table with Height adjustment and trendelenburg position.
- ▶ The radiolucent table surface has a thickness of 10 mm

Technical Specifications

Length of Table	2030 mm
Width of Table	600 mm
Minimum Height	660 mm
Maximum Height	1067 mm
Table Top Sliding	300 mm

>> KMI 1212
IMAGING OPERATING TABLE

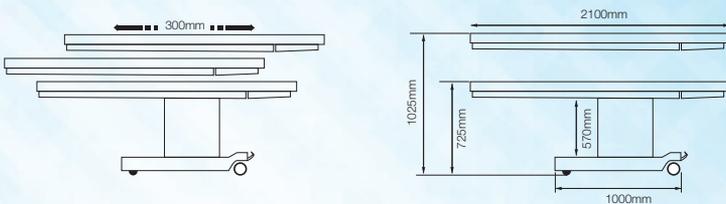

304 Medical Grade
Stainless Steel

Special Features

- ▶ Corded hand Remote
- ▶ Additional operating panel with colour display for electric functions at column
- ▶ Radiolucent table top, fully imaging permeable
- ▶ Table top with side rails made of S.S 304 for attachment of accessories
- ▶ Front side rails made of carbon fibre for attachment of head rest systems
- ▶ Longitudinal shifting table top
- ▶ 50 mm thick mattress

Technical Specifications

Length of Table	2100 mm
Width of Table Top	525 mm
Minimum Height (without Mattress)	Min. 685 mm
Maximum Height (without Mattress)	Max. 990 mm
Table Sliding	300 mm

>> KMI 1213
OBSTETRIC LABOUR TABLE (STAINLESS STEEL)



Special Features

- ▶ The three-section top made of SS, sliding leg section completely under the main section,
- ▶ The base frame made of CRCA tubes.
- ▶ Trendelenburg's position by pneumatic pump
- ▶ Adjustable back-rest on ratchet, provided with side-railing, hand gaps, lithotomic crutches and mattress (fixed height).
- ▶ The base section Pre-Treated and Powder Coated.
- ▶ Also available in Stainless Steel Frame

Technical Specifications

Length of Table	1830 mm
Width of Table	660 mm
Height of Table	760 mm

>> KMI 1214
PEDIATRIC HIP SPICA TABLE



304 Medical Grade
Stainless Steel

Special Features

- ▶ The spica table has an adjustable platform that is efficient and user friendly.
- ▶ It provides both stability and maneuverability while applying a hip spica cast in the treatment of pediatric fractures and dislocations.
- ▶ Whether in clinics, children hospitals, emergency rooms, or general hospitals, the use of the Pediatric Spica Table will ease the treatment of pediatric fractures and dislocations
- ▶ Table Top rotation and overall table length are easily Adjustable, Arm Support Boards, Partial Spine Support and Removable Perineal Post for infant and large child spica cast applications.

Technical Specifications

Length of Table	390 to 750 mm
Width of Table Top	400 mm
Minimum Height	Min. 270 mm
Maximum Height	Max. 370 mm

>> KMI 1215
ELECTRIC BLOOD DONATION CHAIR



Optional

-  Battery Backup

304 Medical Grade
Stainless Steel

Special Features

- ▶ Blood Donation Chair 3 Function
- ▶ Remote controlled electrically operated backrest, leg section and height adjustment.
- ▶ Timotion motor controls
- ▶ With IV pole

Table Positions


- ▶ Height adjustable
- ▶ Back section adjustable
- ▶ Leg section adjustable

Technical Specifications

Length of Chair	1800 mm
Width of Chair	610 mm
Minimum Height (without Mattress)	Min. 550 mm
Maximum Height (without Mattress)	Max. 750 mm
Back Section	±70°
Leg Section	±60°
Max Weight Capacity	150 Kg

>> KMI 1301

ANIMAL OPERATING TABLE ELECTRIC

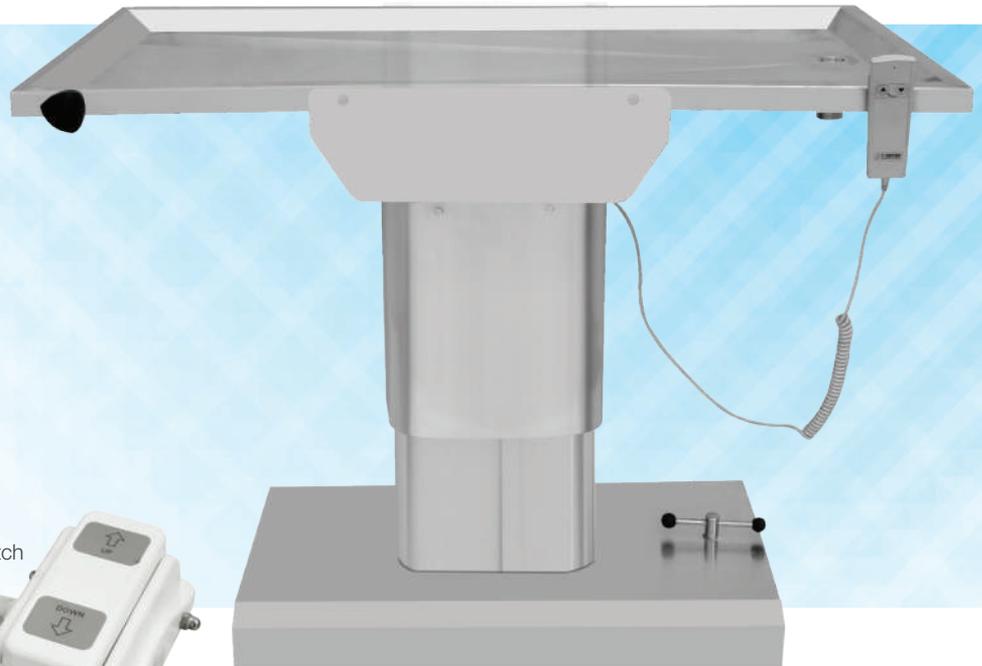

Optional

 Battery Backup

 Foot Switch



304 Medical Grade
Stainless Steel

Special Features

- ▶ Electric up and down function by Remote.
- ▶ It is suitable for small animal's operation, such as cat, dog etc.
- ▶ It is reasonable structured, tight, high performance, easy operation and has very strong practicability.
- ▶ Fully made of Premium Grade 304 Stainless Steel.
- ▶ The surface of the table-top is V shaped and is smooth and easy to clean and disinfect, thus, it can avoid cross infection
- ▶ Equipped with fluid collecting through drainage pipe system.

Technical Specifications

Length of Table	1220 mm (48")
Width of Table	610 mm (24")
Minimum Height	Min. 710 mm
Maximum Height	Max. 965 mm

>> KMI 1302

MONITOR CART

Special Features

- ▶ With a strong and stable platform.
- ▶ Heavy-duty Castors.
- ▶ With Basket for all useses.
- ▶ Trolley Top is with Handle.

Technical Specifications

Table Top Size	260 x 330 mm
Overall height	920 mm
Wheels	75 mm - 4 wheels (2 wheels with lock brakes)





Arm Rest



Leg Support



Anesthetic Screen



Clamps



Mattress



Shoulder Support

OPTIONAL ACCESSORIES



OA-1
Split Leg Section



OA-2
Restraint Body Strap



OA-3
Bolster Pillow



OA-4
Instrument Tray




OA-5
Foot Support




OA-6
Cervical In Supine
/ Laminectomy Frame



OA-7
Humerus Support

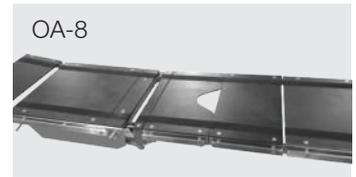

OA-8
Table Length Extension



OA-9
Steinmann Pin
Clamp Holder



OA-10
Spine Surgery using Cushion
Spine Frame



OA-11
Arm Traction Device
/ Perineal Post



OA-12
Urology / Gynae Tray



OA-13
Horse Shoe



OA-14
Knee Support



OA-15
Fixator for Sitting Position



OA-16
Shoulder Surgery



OA-17
Hand Surgery
Table



OA-18
Width Extension
/Obese Attachment



OA-19
Arthroscopy Attachment



OA-20
Wristlet

OPTIONAL ACCESSORIES



KOINAMED

CHOOSE CONFIDENTLY




OA-21

X-Ray Top
Allows for Inserting X-Ray Film Cassette from Head to Foot



OA-22

Orthopaedic Attachment Stand




OA-23

Accessories Stand



OA-24

TKR



OA-25

Extension Bar



OA-26

Urology Attachment



OA-27

Gynae Crutches with Footrest



OA-28

Battery Backup 2-3 Hours for Ceiling Light



OA-29

Solid PU Mattress



OA-30

Knee Chest Position for Spine



OA-31

Lateral Arm Support




OA-32

Attachment for Ophthalmic



OA-33

Wireless Remote For OT Table



OA-34

Manual Override

Awards



Excellence in Business & Service Sector 2023
Asia's Leadership Awards 2023



Winner of Good Samaritan Award
IGHM - 2nd Custodians of Humanity Awards



Best Company in OT Light & Table
9th MT India Healthcare Awards 2019



Winner of **National Healthcare Excellence Awards, 2019**



Winner for Best Manufacturer of Surgical Lights and O.T Tables in India
Better Healthcare Awards 2018



Winner for Best Operation Theatre Tables and O.T Light Manufacturer
Goa Healthcare Excellence Award 2016



Best Manufacturer for LED O.T Lights & Tables
7th Healthcare Leaders Forum 2017



Most Emerging Company in O.T Light & Table
7th MT India Healthcare Awards 2017



Awarded in **7th Healthcare Leaders Forum**



KOINAMED
CHOOSE CONFIDENTLY



KOINAMED

CHOOSE CONFIDENTLY

AN ISO CERTIFIED COMPANY BY



Visit our Website



Chat with us

Koinamed India Pvt. Ltd.



Plot-143, Pocket-9, Sector-24
Rohini-110085, Delhi, India



Phone
+91-11-40043722



Email
info@koinamed.com

A Technomed India Venture

B-292, DSIIDC Indl. Complex, Bawana, Phase-II
Bhorgarh, Delhi-110040, India

GUARANTEE

Every "Koinamed" Equipment is thoroughly tested by our qualified & experienced Engineers before dispatch and carry a Guarantee of Free Repair/Replacement of any part of proven defective manufacture within one year from the date of supply.

Member of:



Customer Care No.
+91-73-73-342-342